

CAMJO-6MP

6MP IR Eyeball Network Camera



- 1/2.9" 6Megapixel progressive scan STARVIS™ CMOS
- H.265&H.264 triple-stream encoding
- 20fps@6MP(3072x2048), 25/30fps@4MP(2688x1520)
- Smart detection supported
- WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 2.8mm fixed lens (3.6mm optional)
- Built-in Mic
- Max. IR LEDs Length 50m
- IP67, PoE



System Overview

With upgraded H.265 encoding technology, Eco-savvy series brings high efficient video compression capability. It can save bandwidth and storage. Meanwhile, the series features starlight, smart IR technology and intelligent image analysis techniques. This series supports reminder function, meanwhile fully protected from dust and water, certified to IP67 and vandal resistant to IK10 standard.

Functions

Wide Dynamic Range (WDR)

The camera achieves vivid images, even in the most intense contrast lighting conditions, using industry-leading wide dynamic range (WDR) technology. For applications with both bright and low lighting conditions that change quickly, true WDR (120 dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

Intelligent Video analysis (IVS)

IVS is a built-in video analytic algorithm that delivers intelligent functions to monitor a scene for Tripwire violations, intrusion detection, and abandoned or missing objects. A camera with IVS quickly and accurately responds to monitoring events in a specific area. In addition to scene analytics, the camera supports face detection to quickly capture a face and upload the image to a server. The camera also offers tamper

detection by recognizing a dramatic scene change and generating a warning message to inspect the camera.

Environmental

Dahua cameras operate in extreme temperature environments, rated for use in temperatures from -30° C to +60° C (-22° F to +140° F) with 95% humidity, allowing the camera to operate in the harshest environments.

Protection (IP67, wide voltage)

The camera allows for ±30% input voltage tolerance, suitable for the most unstable conditions for outdoor applications. Its 6KV lightning rating provides effective protection for both the camera and its structure against lightning. Subjected and certified to rigorous dust and immersion tests (IP67), the camera is the choice for installation in even the most unforgiving environments.

Smart H.265+

Smart H.265+ is the optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 70% when compared to standard H.265 video compression.

Technical Specification

| | | | | | |
|--------------------------|--|--|--|--|--|
| Camera | | | | | |
| Image Sensor | 1/2.9" 6Megapixel progressive scan CMOS | | | | |
| Effective Pixels | 3072(H) x 2048(V) | | | | |
| RAM/ROM | 512MB/32MB | | | | |
| Scanning System | Progressive | | | | |
| Electronic Shutter Speed | Auto/Manual, 1/3(4)~1/100000s | | | | |
| Minimum Illumination | 0.04Lux/F1.6(Color,1/3s,30IRE) 0.4Lux/F1.6(Color,1/30s,30IRE) 0Lux/F1.6(IR on) | | | | |
| S/N Ratio | More than 50dB | | | | |
| IR Distance | Distance up to 50m (164ft) | | | | |
| IR On/Off Control | Auto/ Manual | | | | |
| IR LEDs | 1 | | | | |

| | | | | | |
|----------------------|----------------------------|------------|------------|-----------|----------|
| Lens | | | | | |
| Lens Type | Fixed | | | | |
| Mount Type | Board-in | | | | |
| Focal Length | 2.8mm (3.6mm optional) | | | | |
| Max. Aperture | F1.6(F1.6) | | | | |
| Angle of View | H: 98° (69°), V: 67° (48°) | | | | |
| Optical Zoom | N/A | | | | |
| Focus Control | Fixed | | | | |
| Close Focus Distance | 0.9m (1.7m) | | | | |
| DORI Distance | Lens | Detect | Observe | Recognize | Identify |
| | 2.8 mm | 69m(226ft) | 28m(92ft) | 14m(46ft) | 7m(23ft) |
| | 3.6 mm | 89m(292ft) | 36m(118ft) | 18m(59ft) | 9m(30ft) |

| | | | | | |
|-------------------------|--|--|--|--|--|
| Pan/Tilt/Rotation | | | | | |
| Pan/Tilt/Rotation Range | Pan:0°~360°; Tilt:0°~78°; Rotation:0°~360° | | | | |

| | | | | | |
|--------------------------------|---|--|--|--|--|
| Intelligence | | | | | |
| IVS | Tripwire, Intrusion, Object Abandoned/Missing | | | | |
| Advanced Intelligent Functions | Face Detection | | | | |

| | | | | | |
|----------------------|---|--|--|--|--|
| Video | | | | | |
| Compression | H.265+/H.265/H.264+/H.264 | | | | |
| Streaming Capability | 3 Streams | | | | |
| Resolution | (3072×2048)/(3072×1728)/(2592×1944)/ (2688×1520)/(2560×1440)/ (2304×1296)/1080P(1920×1080)/ SXGA(1280×1024)/1.3M(1280× 960)/720P(1280×720)/D1(704×576/704×480)/ CIF(352×288/352×240) | | | | |
| Frame Rate | Main Stream: 6MP (1~20fps), 4MP(1~25/30fps) | | | | |
| | Sub Stream: D1(1~25/30fps) | | | | |
| | Third Stream: 1080P(1~25/30fps) | | | | |
| Bit Rate Control | CBR/VBR | | | | |
| Bit Rate | H.264: 24K ~ 10240Kbps H.265: 14K ~ 9984Kbps | | | | |
| Day/Night | Auto(ICR) / Color / B/W | | | | |
| BLC Mode | BLC / HLC / WDR(120dB) | | | | |

| | |
|--------------------------------------|---|
| White Balance | Auto/Natural/Street Lamp/Outdoor/Manual |
| Gain Control | Auto/Manual |
| Noise Reduction | 3D DNR |
| Motion Detetion | Off / On (4 Zone, Rectangle) |
| Region of Interest | Off / On (4 Zone) |
| Electronic Image Stabilization (EIS) | N/A |
| Smart IR | Support |
| Defog | N/A |
| Digital Zoom | 16x |
| Flip | 0°/90°/180°/270° |
| Mirror | Off / On |
| Privacy Masking | Off / On (4 Area, Rectangle) |

| | |
|-------------|-----------------------------|
| Audio | |
| Compression | G.711a/ G.711Mu/ AAC/ G.726 |

| | |
|---------------------|---|
| Network | |
| Ethernet | RJ-45 (10/100Base-T) |
| Protocol | HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP;NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP |
| Interoperability | ONVIF, PSIA, CGI |
| Streaming Method | Unicast / Multicast |
| Max. User Access | 10 Users /20 Users |
| Edge Storage | NAS Local PC for instant recording |
| Web Viewer | IE, Chrome, Firefox, Safari |
| Management Software | Smart PSS, DSS, Easy4ip |
| Smart Phone | IOS, Android |

| | |
|----------------|--|
| Certifications | |
| Certifications | CE (EN 60950:2000) UL:UL60950-1 FCC: FCC Part 15 Subpart B |

| | |
|-----------------|--------------|
| Interface | |
| Video Interface | N/A |
| Audio Interface | Built-in Mic |
| RS485 | N/A |
| Alarm | N/A |

| | |
|-------------------|-------------------------------|
| Electrical | |
| Power Supply | DC12V, PoE (802.3af)(Class 0) |
| Power Consumption | <6W |


Environmental

| | |
|----------------------|---|
| Operating Conditions | -30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH |
| Storage Conditions | -30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH |
| Ingress Protection | IP67 |
| Vandal Resistance | N/A |

Construction

| | |
|--------------|-----------------------------|
| Casing | Metal |
| Dimensions | Φ106mm×93.7mm (4.17"×3.69") |
| Net Weight | 0.47Kg (1.04lb) |
| Gross Weight | 0.65Kg (1.43lb) |

Dimensions (mm/inch)

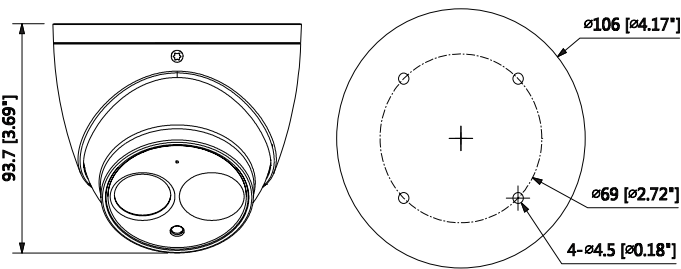

Accessories

Optional:



Junction
Box




Wall Mount



Pole Mount

Junction Mount

Pole Mount



Wall Mount

